


T/P PIN	SYMBOL
1	XL
2	YD
3	XR
4	YU

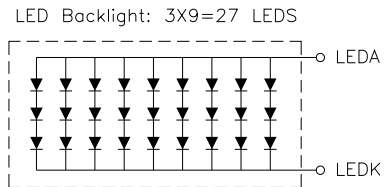

- Notes:
- 7.0" Transmissive, Normally-White TFT LCD
 - View Direction: 6:00
 - Interface: LVDS
 - Touch Panel: 4-wire Resistive
 - Operation Temp.: -20°C to 70°C
 - Storage Temp.: -30°C to 80°C
 - VDD=3.0V to 3.6V

PIN	SYMBOL
1	VCOM
2	DVDD
3	DVDD
4	NC
5	RESET
6	STBYB
7	GND
8	RIND0-
9	RIND0+
10	GND
11	RIND1-
12	RIND1+
13	GND
14	RIND2-
15	RIND2+
16	GND
17	RINC-
18	RINC+
19	GND
20	RIND3-
21	RIND3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DIMO
28	SELB
29	AVDD
30	GND
31	LEDK
32	LEDK
33	L/R
34	U/D
35	VGL
36	CABCEN1
37	CABCEN0
38	VGH
39	LEDA
40	LEDA

LT070B-03AT

DWN.	LYJ	TITLE	LCM OUTLINE DIMENSION		
CHK.	LY	PART NO.	LT070B-03AT		
APPD.		DWG. NO.	LT070B-03AT-WXA		
REV.	A	UNIT	mm	PROJECTION	
DATE	2018.12.06	SCALE	NTS	SHEET	1 OF 1