


# LT043C-33AT 4.3" 480(RGB) x 272 TFT with MCU interface & touch panel, VDD=3.3V

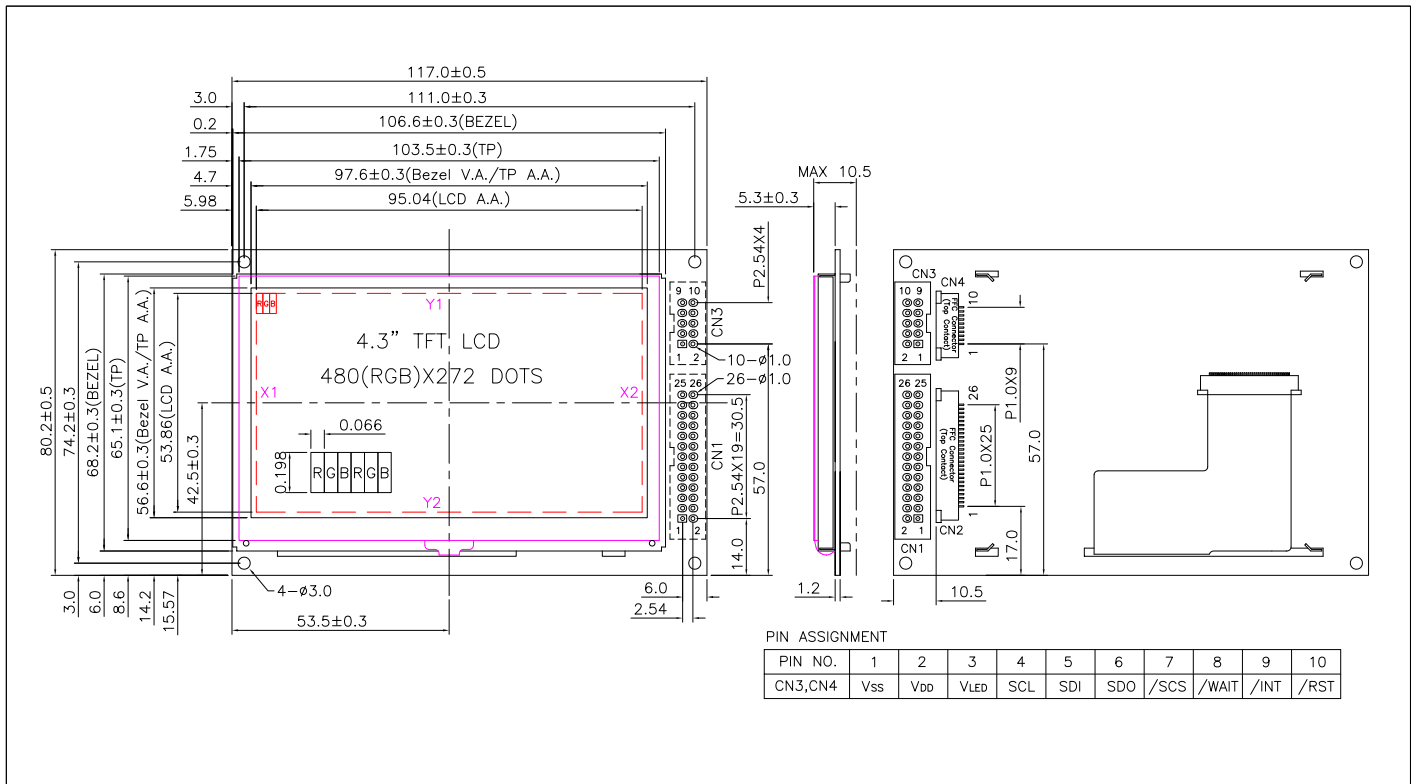

## ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit
Supply Voltage(Logic)	V <sub>DD</sub> - V <sub>SS</sub>	-0.3	3.6	V
Supply Voltage(LED)	V <sub>LED</sub> - V <sub>SS</sub>	-0.3	6.0	V
Input Voltage	V <sub>I</sub>	-0.3	V <sub>DD</sub> + 0.3	V
Operating Temp.	T <sub>opr</sub>	-20	70	°C
Storage Temp.	T <sub>stg</sub>	-30	80	°C

## MECHANICAL DATA

Item	Nominal Dimensions	Unit
Module Size ( W x H x T )	117.0 x 80.2 x 10.5	mm
Viewing Area ( W x H )	97.6 x 56.6	mm
Active Area ( W x H )	95.04 x 53.86	mm
Dot Pitch ( W x H )	0.066 x 0.198	mm
Weight	Approx. 100	g

## ELECTRICAL CHARACTERISTICS ( V<sub>DD</sub>=3.3V)

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input High Voltage	V <sub>IH</sub>	--	0.8V <sub>DD</sub>	--	V <sub>DD</sub>	V
Input Low Voltage	V <sub>IL</sub>	--	0	--	0.2V <sub>DD</sub>	V
Output High Voltage	V <sub>OH</sub>	--	V <sub>DD</sub> -0.4	--	V <sub>DD</sub>	V
Output Low Voltage	V <sub>OL</sub>	--	0	--	0.4	V
Supply Current (Logic)	I <sub>DD</sub>	V <sub>DD</sub> = 3.3V	--	55	70	mA
Supply Current (LED)	I <sub>LED</sub>	V <sub>LED</sub> = 3.3V	--	130	150	mA
		V <sub>LED</sub> = 5.0V	--	80	100	mA

## PIN CONNECTIONS (CN1/CN2)

Pin	Symbol	Level	Function
1	V <sub>SS</sub>	0V	GND
2	V <sub>DD</sub>	3.3V	Power supply
3	V <sub>LED</sub>	3.3V-5V	Power supply for LED B/L drivers
4	RS	H/L	Data or command selection H: Command L: Display data
5	/WR (R/W)	H/L	Write signal for 8080 MCU. R/W signal for 6800 MCU.
6	/RD (E)	H/L	Read signal for 8080 MCU. Enable signal for 6800 MCU.
7	/CS	L	Chip selection signal. Active "L".
8	/RST	L	Reset signal. Active "L".
9	/WAIT	L	Wait signal output. Active "L".
10	/INT	L	Interrupt signal output. Active "L".
11	DB0	H/L	Data bus for 8-bit data bus mode. Low order data bus for 16-bit data bus mode.
12	DB1	H/L	
13	DB2	H/L	
14	DB3	H/L	
15	DB4	H/L	
16	DB5	H/L	
17	DB6	H/L	
18	DB7	H/L	High order data bus for 16-bit data bus mode. Keep DB8 to DB15 open when 8-bit data bus mode is used.
19-26	DB8 to DB15	H/L	

## BLOCK DIAGRAM

